



Company Profile

公司简介

东莞市珏煊自动化设备有限公司坐落于粤港澳大湾区的核心城市、智能制造中心——广东省东莞市。

东莞市珏煊自动化始终专注“薄膜复卷分切领域，领跑行业自动化发展”是一家通过不断创新，在实践中成长集研发、生产、销售为一体技术科研密集型企业。

珏煊自动化设备有限公司自成立之初，投身于薄膜复卷分切设备的研发生产，不断投入重金引进科研人才和先进的技术理念。专业自主研发生产：缠绕膜复卷分切机，电线膜分切机，高低粘保护膜分条机，CPE/CPP薄膜分条机，铝箔（锡纸）复卷机，降解膜，PE高压膜分条机，宽幅20-1600mm型，可非标定制。

由生产至研发，由资源整合至完善的运维解决方案，珏煊自动化设备有限公司始终坚持人才为本、兼容发展、以客户为中心，优化技术体系、完善个性化需求，形成了一系列技术复研、开发、维护、售后系统。打造行业领先的多元化的竞争力和创造力。

东莞市珏煊自动化设备有限公司秉承品质与服务的经营理念，个性化需求，个性化发展，愿秉承“开拓创新，追求卓越”的发展理念，竭诚服务新老客



Dongguan JueXuan Automation Equipment Co., Ltd. is located in the core city of Guangdong-Hong Kong-Macao Greater Bay Area, intelligent manufacturing center - Dongguan City, Guangdong Province.

Dongguan juexuan automation has always focused on "film rewinding cutting field, leading the development of automation industry" is a through continuous innovation, in practice growth set R & D, production, sales as one of the technical research intensive enterprises.

Since its establishment, juexuan automation equipment co., LTD has devoted itself to the research and development and production of film rewinding and cutting equipment, and has continuously invested heavily in the introduction of scientific research talents and advanced technical concepts. Professional independent research and development production: winding film rewinding slitting machine, wire film slitting machine, high and low viscosity protective film slitting machine,CPE/CPP film slitting machine, aluminum foil (tin foil) rewinding machine, degradation film, PE high-pressure film slitting machine, wide 20-1600mm type, can be non-standard customization.

From production to research and development, from resource integration to perfect operation and maintenance solutions, Jue xuan Automation Equipment Co., Ltd. has always adhered to the people-oriented, compatible development and customer-oriented, optimized the technical system and improved the personalized needs, and formed a series of technical re-research, development, maintenance and after-sales systems. Build industry-leading diversified competitiveness and creativity.


Dongguan JueXuan Automation Equipment Co., Ltd. adhering to the quality and service business philosophy, personalized needs, personalized development, is willing to uphold the "pioneering and innovative, the pursuit of excellence" concept of development, wholeheartedly serve new and old customers, win-win cooperation, to create the future!



JX-1000

四轴自动缠绕膜分切机

Four-axis automatic stretch film slitting machine

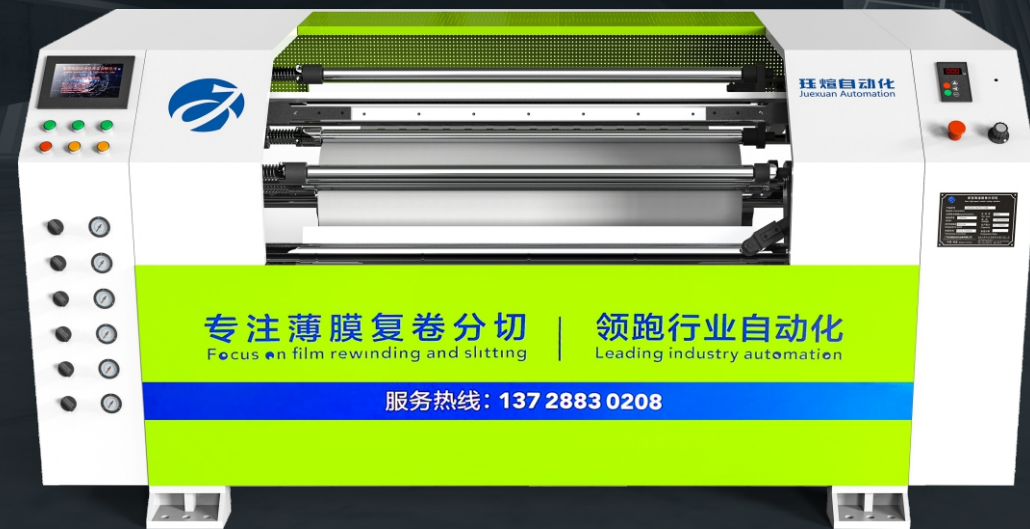

产品特点 / Features

本机组采用四轴换卷，配合自动式切刀，自动断膜，自动上膜，自动换卷，自动排卸纸管，整机操作简单方便，即保证了分切的效果，又提升了分切的产量，降低生产成本的同时，也为客户创造了更大价值。

The machine adopts four axis rewinding, with automatic cutting knife, automatic film breaking, automatic film loading, automatic rewinding, automatic discharge tube, the machine is simple and convenient to operate, which ensures the cutting effect, and improves the cutting output, reduces the production cost, but also creates greater value for customers.

产品用途 / Product usage

本机适用于缠绕膜、拉伸膜、流延膜、保鲜膜、捆菜膜等塑料薄膜的复卷。
This machine is suitable for winding film, stretch film, flow film, cling film, baling film and other plastic film rewinding.

技术参数 / Parameters

| | |
|---|--|
| 最大分切宽度 Maximum slitting width | 200-1300mm |
| 贴合最大宽幅 Fitting maximum width | 200-1300mm |
| 分条宽度 Split width | 30-1500mm |
| 机械设计线速度 Mechanical design line speed | 1000M/min |
| 母卷最大入料直径 Maximum feeding diameter of mother roll | 800mm |
| 收卷最大直径 Maximum rewinding diameter | 130mm |
| 适用纸管内径 Applicable paper tube inner diameter | 38mm/25mm |
| 分切厚度 Slitting thickness | 0.012-0.05mm |
| 电机/变频 Motor/frequency conversion | 5.5w |
| 使用电压 Operating voltage | 三相380V 50HZ 可非标订制 three-phase 380V 50HZ can be non-customized |
| 机器净重 Net weight | 1.6T |

JX-1000

全自动四轴缠绕膜复卷机

Automatic four-axis stretch film rewinder

产品用途 / Product usage

本机适用于缠绕膜、拉伸膜、流延膜、保鲜膜、捆菜膜等塑料薄膜的复卷和分切之多功能设备
This machine is suitable for winding film, stretch film, flow film, cling film, baling film and other plastic film rewinding and cutting multi-functional equipment



产品特点 / Features

本机组采用四轴换卷，伺服传动，碟刹式刹车，配合自动式切刀，自动断膜，自动上膜，自动换卷，自动装卸纸管，气胀轴自动打气，放气，设计速度每分钟800米，确保操作既安全又方便，收卷更加结实、平整、保证了产品的质量。整机操作简单方便，即保证了分切的效果，又提升了分切的产量，降低生产成本的同时，也为客户创造了更大价值。

This unit USES four axis in volume, servo drive, brake disc brake type, with automatic type cutter, automatic film, automatic film, automatic volume change, automatic loading and unloading of paper tube, inflatable shaft automatic cheer, deflated, design speed of 800 meters per minute, to ensure the safe and convenient operation, winding more sturdy, flat, guarantee the quality of the product. The operation of the machine is simple and convenient, which ensures the effect of slitting, and improves the output of slitting, reduces the production cost, and also creates greater value for customers.

技术参数 / Parameters

| | |
|------------------------------------|-------------|
| 型 号 Model size | JX—500 |
| 母卷宽度 Width of mother roll | 300—500mm |
| 成品宽度 Width of finished product | 300mm—500mm |
| 机械线速 Mechanical line speed | 0—1000m/Min |
| 母卷直径 Mother roll diameter | 450mm |
| 子卷直径 Subroll diameter | 180mm |
| 母卷纸芯 Paper core for mother roll | 3" |
| 子卷卷芯 Subroll core | 2"3" |

JX-1000/1300

高速薄膜分切机+纠偏系统+吹边装置


High speed film slitting machine + rectifying system + edge blowing device



产品用途 / Product usage

PE高压膜、收缩膜、胶带膜、保护膜、降解膜、等塑料薄膜的复卷和分切之多功能设备

PE high pressure film, shrinkage film, tape film, protective film, degradation film, and other plastic film rewinding and cutting multifunctional equipment

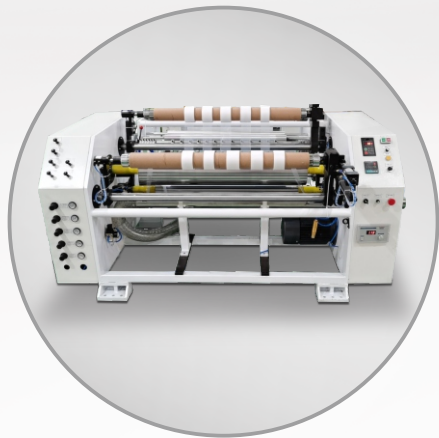

产品特点 / Features

- **操作方式:** 整机采用人机界面，本机各部控制，集中触摸屏操作。
- **长度计算:** 采用编码器测速并计长度。
- **数据显示:** 触摸屏显示生产长度，运行长度，设定长度以及生产状态等。
- **运转控制:** 整机马达变频无极调速。
- **收放卷轴特点:** 整机采用气胀轴自动打气、放气，无需人工上下来回装卸杆子，另增设膜平整机构，可使复卷分切出来的膜保持平整，整台设备采用多个气动结构，使设备控制更加稳定，本机操作简单、省时省力、降低人工劳动强度大幅度提高生产效率
- **张力控制:** 整机采用机械式张力控制，保证张力稳定无波动。
- **纠偏系统+吹边装置:** 整机采用纠偏系统，保证膜不跑位、不毛边。另加有吹边装置可以通过吹边装置将多余的边料妥善的处理掉。

- **Operation mode:** the machine adopts man-machine interface, each part of the machine control, centralized touch screen operation.
- **Length calculation:** the encoder is used to measure speed and length.
- **Data display:** touch screen displays production length, running length, setting length and production status, etc.
- **Operation control:** the machine motor frequency conversion stepless speed regulation.
- **scroll release features:** the machine adopts automatic cheer, deflated inflatable axis, manual loading and unloading rod back and forth, up and down the other have film leveling mechanism, can make the membrane of rewinding cutting out keep smooth, the whole machine adopts multiple pneumatic structure, make the equipment control is more stable, the operation is simple, save time and effort, reduce artificial labor intensity greatly improved production efficiency
- **Tension control:** the machine adopts mechanical tension control to ensure stable tension and no fluctuation.
- **Deviation rectifying system + edge blowing device:** the whole machine adopts deviation rectifying system to ensure that the film does not run out of position and not burr. In addition, the edge blowing device can be used to properly dispose the excess edge material through the edge blowing device.

技术参数 / Parameters

| | |
|---|---------------------|
| 最大分切宽度 Maximum slitting width | 1000mm |
| 贴合最大宽幅 Fitting maximum width | 1000mm |
| 分条宽度 Split width | 30-1000mm |
| 机械设计线速度 Mechanical design line speed | 1000M/min |
| 母卷最大入料直径 Maximum feeding diameter of the mother coil | 450mm |
| 收卷最大直径 Maximum rewinding diameter | 260mm |
| 适用纸管内径 Applicable paper tube inner diameter | 76mm/50mm/38mm/25mm |
| 分切厚度 Slitting thickness | 0.012-0.05mm |
| 变频/电机 Frequency conversion/motor | 4kw |
| 使用电压 Operating voltage | 三相380V 50HZ 可非标订制 |
| 机器净重 Net weight | 1.2T |

JX-1500


多功能薄膜复卷分条机

Multi-function film rewinding and slitting machine

产品用途 / Product usage

本机适用于PE缠绕膜，拉伸膜，保护膜，电线膜，捆菜膜,PVC保鲜膜的复卷，分切之多功能设备。

This machine is suitable for the rewinding and slitting of PE stretch film, stretch film, protective film, wire film, vegetable wrap film, and PVC cling film.

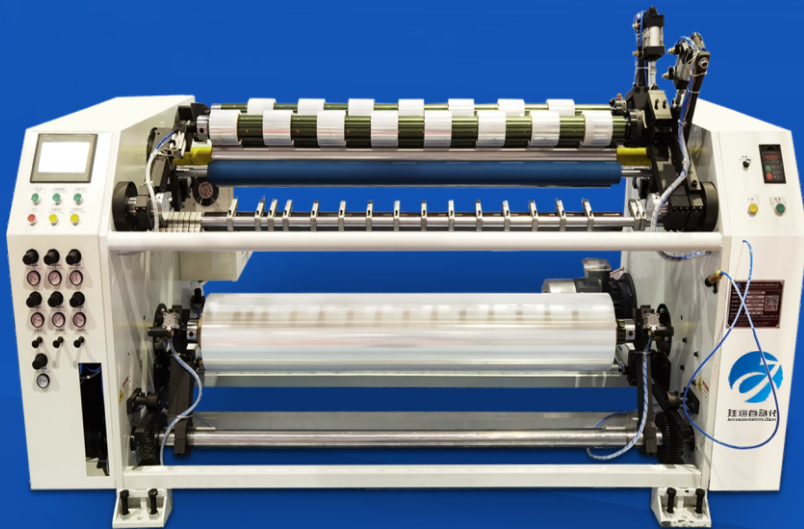

技术参数 / Parameters

| | |
|---|--|
| 功能名称 Function name | 功能范围 Function range |
| 最大分切宽度 Cutting width | 1500mm |
| 贴合最大宽幅 Fits the largest width | 1500mm |
| 分条宽度 Strip width | 30-1500mm |
| 机械设计线速度 Mechanical design linear speed | 1500M/min |
| 母卷最大入料直径 Maximum feeding diameter of mother roll | 450mm |
| 收卷最大直径 Maximum diameter of winding | 260mm |
| 适用纸管内径 Applicable paper tube inner diameter | 76mm/50mm/38mm/26mm 可非标订制(Can be customized) |
| 分切厚度 Cutting thickness | 0.012-0.05mm |
| 主电机 / 变频功率 Main motor/frequency conversion power | 4kw |
| 使用电压 Use voltage | 三相380V 50HZ 可非标订制 Three-phase 380V 50HZ can be customized |
| 机器净重 Machine net weight | 0.8T |
| 机器尺寸 Machine size | 1800×905×1100mm |

产品特点 / Features

- **操作方式:** 整机采用人机界面，本机各部控制，集中触摸屏操作。
- **长度计算:** 采用编码器测速并计长度。
- **数据显示:** 触摸屏显示生产长度，运行长度，设定长度以及生产状态等。
- **运转控制:** 整机马达变频无极调速。
- **收放卷轴特点:** 整机采用气胀轴自动打气、放气，无需人工上下来回装卸杆子，另增设膜平整机构，可使复卷分切出来的膜保持平整，不跑位和不毛边，整台设备采用多个气动结构，使设备控制更加稳定，本机操作简单、省时省力、降低人工劳动强度大幅度提高生产效率
- **张力控制:** 整机采用机械式张力控制，保证张力稳定无波动。

- Operation mode: The whole machine adopts man-machine interface, each part of this machine is controlled, and centralized touch screen operation.
- Length calculation: use encoder to measure speed and count length.
- Data display: touch screen displays production length, running length, set length and production status, etc.
- Operation control: frequency conversion stepless speed regulation of the whole motor.
- Features of rewinding and unwinding reel: The whole machine adopts an inflation shaft to automatically inflate and deflate, without the need to manually up and down to load and unload the rod, and an additional film leveling mechanism is added to keep the film from rewinding and slitting flat and not out of position. No burrs, the whole equipment adopts multiple pneumatic structures to make the equipment control more stable
- Tension control: The machine adopts mechanical tension control to ensure stable tension without fluctuation.
- Tension control: The machine adopts mechanical tension control to ensure stable tension without fluctuation.
- The equipment adopts multiple pneumatic structures to make the equipment control more stable, the machine is simple to operate, save time and effort, and reduce Low labor intensity greatly improves production efficiency
- Tension control: The machine adopts mechanical tension control to ensure stable tension without fluctuation.
- Laminating method: lower light roller, upper rubber roller rolling laminating roller group.
- Winding method: frictional winding power system, adjustable forward and reverse steering, or separate operation.

JX-1000

新型高速缠绕膜复卷分切机
New high speed winding film rewinding and slitting machine

产品用途 / Product usage

本机适用于PE缠绕膜, PVC保鲜膜, 拉伸膜, 保护膜, PVC电线膜的复卷, 分切之多功能设备。
This machine is suitable for rewinding and slitting of winding film, cling film, stretch film, protective film, PVC wire film

产品特点 / Features

- Operation mode: The whole machine adopts man-machine interface, each part of this machine is controlled, and centralized touch screen operation.
- Length calculation: use encoder to measure speed and count length.
- Data display: touch screen displays production length, running length, set length and production status, etc.
- Operation control: frequency conversion stepless speed regulation of the whole motor.
- Features of rewinding and unwinding reel: The whole machine adopts an inflation shaft to automatically inflate and deflate, without the need to manually up and down to load and unload the rod, and an additional film leveling mechanism is added to keep the film from rewinding and slitting flat and not out of position. No burrs, the whole equipment adopts multiple pneumatic structures to make the equipment control more stable
- Tension control: The machine adopts mechanical tension control to ensure stable tension without fluctuation.
- Tension control: The machine adopts mechanical tension control to ensure stable tension without fluctuation.
- The equipment adopts multiple pneumatic structures to make the equipment control more stable, the machine is simple to operate, save time and effort, and reduce Low labor intensity greatly improves production efficiency
- Tension control: The machine adopts mechanical tension control to ensure stable tension without fluctuation.
- Laminating method: lower light roller, upper rubber roller rolling laminating roller group.
- Winding method: frictional winding power system, adjustable forward and reverse steering, or separate operation.
- **操作方式:**整机采用人机界面, 本机各部控制, 集中触摸屏操作。
- **长度计算:**采用编码器测速并计长度。
- **数据显示:**触摸屏显示生产长度, 运行长度, 设定长度以及生产状态等。
- **运转控制:**整机马达变频无极调速。
- **收放卷轴特点:**整机采用气胀轴自动打气、放气, 无需人工上下来回装卸杆子, 另增设膜整平机构, 可使复卷分切出来的膜保持平整, 不跑位和不毛边, 整台设备采用多个气动结构, 使设备控制更加稳定, 本机操作简单、省时省力、降低人工劳动强度大幅度提高生产效率
- **张力控制:**整机采用机械式张力控制, 保证张力稳定无波动。

技术参数 / Parameters


| | |
|---|--|
| 功能名称 Function name | 功能范围 Function range |
| 最大分切宽度 Cutting width | 1000mm |
| 贴合最大宽幅 Fits the largest width | 1000mm |
| 分条宽度 Strip width | 30-1000mm |
| 机械设计线速度 Mechanical design linear speed | 1000M/min |
| 母卷最大入料直径 Maximum feeding diameter of mother roll | 450mm |
| 收卷最大直径 Maximum diameter of winding | 260mm |
| 适用纸管内径 Applicable paper tube inner diameter | 76mm/50mm/38mm/26mm 可非标订制(Can be customized) |
| 分切厚度 Cutting thickness | 0.012-0.05mm |
| 主电机 / 变频功率 Main motor/frequency conversion power | 4kw |
| 使用电压 Use voltage | 三相380V 50HZ 可非标订制 Three-phase 380V 50HZ can be customized |
| 机器净重 Machine net weight | 0.8T |
| 机器尺寸 Machine size | 1800×905×1100mm |

JX-1000

双收双备缠绕膜复卷分切机
Double receiving double standby winding film rewinding slitting machine

产品用途 / Product usage

本机适用于PE缠绕膜, 拉伸膜, 保护膜, 电线膜, 捆菜膜, PVC保鲜膜的复卷, 分切之多功能设备。
This machine is suitable for the rewinding and slitting of PE stretch film, stretch film, protective film, wire film, vegetable wrap film, and PVC cling film.

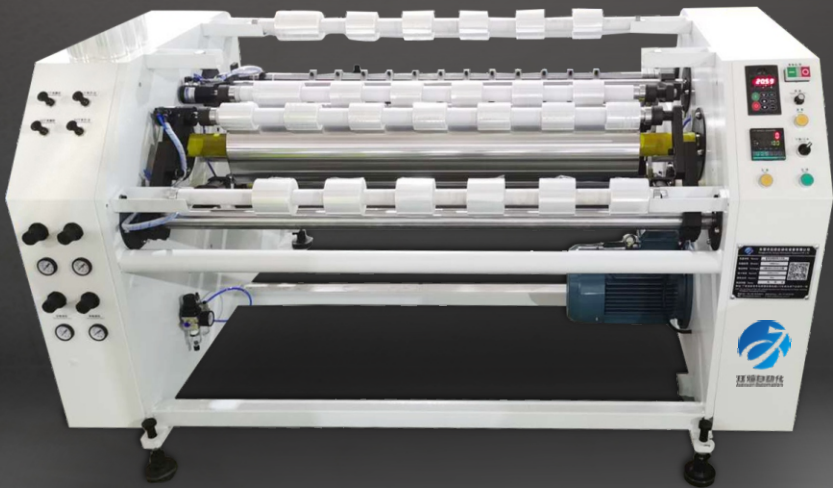

技术参数 / Parameters

| | |
|---|--|
| 功能名称 Function name | 功能范围 Function range |
| 最大分切宽度 Cutting width | 1000mm |
| 贴合最大宽幅 Fits the largest width | 1000mm |
| 分条宽度 Strip width | 30-1500mm |
| 机械设计线速度 Mechanical design linear speed | 1000M/min |
| 母卷最大入料直径 Maximum feeding diameter of mother roll | 450mm |
| 收卷最大直径 Maximum diameter of winding | 260mm |
| 适用纸管内径 Applicable paper tube inner diameter | 76mm/50mm/38mm/26mm 可非标订制(Can be customized) |
| 分切厚度 Cutting thickness | 0.012-0.05mm |
| 主电机 / 变频功率 Main motor/frequency conversion power | 4kw |
| 使用电压 Use voltage | 三相380V 50HZ 可非标订制 Three-phase 380V 50HZ can be customized |
| 机器净重 Machine net weight | 0.8T |
| 机器尺寸 Machine size | 1800×905×1100mm |

产品特点 / Features

- **操作方式:**简易型操作控制面板, 本机各部控制, 集中面板操作。
- **长度计算:**采用计米器测速并计长度。3、**数据显示:**转速、张力均为数字式显示。
- **运转控制:**整机马达变频无极调速。
- **收放卷轴特点:**入料采用气胀轴, 提供简易轮松之上料, 大幅提升工作效率。
- **张力控制:**整机采用机械式张力控制, 保证张力稳定无波动。
- **贴合方式:**下光辊轮, 上橡胶辊滚动式贴合压轮组。
- **收卷方式:**采用气缸夹头装置, 两收两备结构, 高大幅提升产品质量, 产品效力。
- Operation mode: simple operation control panel, control of each part of the machine, centralized panel operation.
- Length calculation: use meter counter to measure speed and length.
- Data display: The speed and tension are all digitally displayed.
- Operation control: The motor of the whole machine is frequency-converted and steplessly adjusted.
- Features of rewinding and unwinding reel: Inflatable shaft is used for feeding material, providing simple wheel loosening and feeding, which greatly improves work efficiency.
- Tension control: The whole machine adopts mechanical tension control to ensure stable tension without fluctuation.
- Laminating method: lower light roller, upper rubber roller rolling type laminating pressure wheel group.
- Rewinding method: adopts air cylinder chuck device, two rewinding and two preparation structure, which greatly improves product quality and product effectiveness.

JX-500

新型高速薄膜速复卷分切机

New high speed film rewinding and slitting machine

产品用途 / Product usage

本机适用于PE缠绕膜, PVC保鲜膜, 拉伸膜, 保护膜, PVC电线膜的复卷, 分切之多功能设备。
This machine is suitable for rewinding and slitting of winding film, cling film, stretch film, protective film, PVC wire film

产品特点 / Features

- Operation mode: The whole machine adopts man-machine interface, each part of this machine is controlled, and centralized touch screen operation.
- Length calculation: use encoder to measure speed and count length.
- Data display: touch screen displays production length, running length, set length and production status, etc.
- Operation control: frequency conversion stepless speed regulation of the whole motor.
- Features of rewinding and unwinding reel: The whole machine adopts an inflation shaft to automatically inflate and deflate, without the need to manually up and down to load and unload the rod, and an additional film leveling mechanism is added to keep the film from rewinding and slitting flat and not out of position. No burrs, the whole equipment adopts multiple pneumatic structures to make the equipment control more stable
- Tension control: The machine adopts mechanical tension control to ensure stable tension without fluctuation.
- Tension control: The machine adopts mechanical tension control to ensure stable tension without fluctuation.
- The equipment adopts multiple pneumatic structures to make the equipment control more stable, the machine is simple to operate, save time and effort, and reduce Low labor intensity greatly improves production efficiency
- Tension control: The machine adopts mechanical tension control to ensure stable tension without fluctuation.
- Laminating method: lower light roller, upper rubber roller rolling laminating roller group.
- Winding method: frictional winding power system, adjustable forward and reverse steering, or separate operation.

- **操作方式:**整机采用人机界面, 本机各部控制, 集中触摸屏操作。
- **长度计算:**采用编码器测速并计长度。
- **数据显示:**触摸屏显示生产长度, 运行长度, 设定长度以及生产状态等。
- **运转控制:**整机马达变频无极调速。
- **收放卷轴特点:**整机采用气胀轴自动打气、放气, 无需人工上下来回装卸杆子, 另增设膜整平机构, 可使复卷分切出来的膜保持平整, 不跑位和不毛边, 整台设备采用多个气动结构, 使设备控制更加稳定, 本机操作简单、省时省力、降低人工劳动强度大幅度提高生产效率
- **张力控制:**整机采用机械式张力控制, 保证张力稳定无波动。

技术参数 / Parameters

| 功能名称 Function name | 功能范围 Function range |
|---|--|
| 最大分切宽度 Cutting width | 500mm |
| 贴合最大宽幅 Fits the largest width | 500mm |
| 分条宽度 Strip width | 30-500mm |
| 机械设计线速度 Mechanical design linear speed | 500M/min |
| 母卷最大入料直径 Maximum feeding diameter of mother roll | 450mm |
| 收卷最大直径 Maximum diameter of winding | 260mm |
| 适用纸管内径 Applicable paper tube inner diameter | 76mm/50mm/38mm/26mm 可非标订制(Can be customized) |
| 分切厚度 Cutting thickness | 0.012-0.05mm |
| 主电机 / 变频功率 Main motor/frequency conversion power | 4kw |
| 使用电压 Use voltage | 三相380V 50HZ 可非标订制 Three-phase 380V 50HZ can be customized |
| 机器净重 Machine net weight | 0.8T |
| 机器尺寸 Machine size | 1800×905×1100mm |

JX-500

半自动缠绕膜分切复卷机

Semi-automatic film slitting and rewinding machine

产品用途 / Product usage

本机适用于拉伸膜、缠绕膜、流延膜、保鲜膜等塑料薄膜的复卷用分切
This machine is suitable for slitting rewinding of plastic films such as stretch film, stretch film, casting film, cling film, etc.

产品特点 / Features

- 本机操作简易、安全, 使收卷材料更加平整、结实, 与空气接触后使拉力、抗刺穿力更好。
- 通过复卷可以纠正产品的错层, 提高卷材的平整度、外观质量等技术指标。
- 收卷轴纸管直径26/38/50/76mm, 可以自由切换。
- 本机调节方便灵活, 噪音小, 变频调速, 新款双工位换卷, 收卷自动计数器, 是目前性价比较高的理想复卷, 分切设备。
- The machine is easy and safe to operate, making the winding material smoother and stronger, and making the pulling force and puncture resistance better after contact with air.
- Rewinding can correct the product's staggered layer and improve the flatness, appearance quality and other technical indicators of the coil.
- The diameter of the reel paper tube is 26/38/50/76mm, which can be switched freely.
- This machine is convenient and flexible to adjust, low noise, frequency conversion speed regulation, new double-station rewinding, rewinding automatic counter, it is an ideal rewinding and slitting equipment with high cost performance.



型号 Model

成品宽度(mm): 500
Finished product width

电机功率(kw): 2.2
Motor Power

机械线速(m/min): 500
Mechanical line speed

上卷形式(mm): By hand
Roll-up form

母卷直径(mm): 450
Parent roll diameter

母卷最大宽度(mm): 500
Maximum width of parent roll

母卷卷芯规格: 3"
Width of finished product(mm)

子卷宽度(mm): 50-500
Width of sub-roll

子卷直径(max)(mm): 220
Diameter of sub-roll

子卷卷芯规格: 1"2"3"
Core specification of sub-roll

外形尺寸(mm): 1350(W)×1050(L)×1150(H)
Overall dimensions(mm)

重量(T): 0.4
Weight(T)



JX-500

缠绕膜全自动复卷机

Automatic winding film rewinding machine



技术参数 Technical Parameters

| | |
|---------------------------------|-------------|
| 型号 Model | JX-500 |
| 母卷宽度 Width Of Mother Roll | 300-500mm |
| 成品宽度 Width Of Finish Roll | 300mm-500mm |
| 机械线速 Speed | 0-1000m/Min |
| 母卷直径 Mother Roll Daimeter | 400mm |
| 子卷直径 Finish Roll DiameterMax | 150mm |
| 母卷纸芯 Core Of Mother Roll | 3" |
| 子卷纸芯 Core Of Finish Roll | 3"、2" |

产品特点 / Features

- PLC+人机界面+变频器控制系统, 自动化程度高;
- 人机界面手动及输入界面显示, 易操作, 方便故障检查;
- 自动下管、更换卷芯、切割及落料; 带静电上膜装置, 上膜速度稳定不缠辊
- 配置输送带(选购), 可单人完成操作机器及成品装箱作业

- PLC + human-machine interface + inverter control system, high degree of automation;
- Man-machine interface manual and input interface display, easy to operate, convenient for fault checking;
- Automatic lowering tube, changing core, cutting and blanking; with electrostatic film coating device, the film coating speed is stable without wrapping the roller
- Equipped with conveyor belt (optional), can complete the operation of the machine and the packaging of the finished product by a single person




JX-500

Five-station plastic wrap automatic point-breaking rewinding machine 五工位保鲜膜自动点断复卷机



技术参数 Technical Parameters

| | |
|------------------------------|---------------------|
| 型号 Model | HTR-C300 |
| 母卷宽度 Width Of Mother Roll | 300-500mm |
| 成品宽度 Width Of Finish Roll | 300-500mm |
| 机械线速 Speed | Max12rolls(30m)/min |
| 母卷直径 Mother Roll Daimeter | 500mm |
| 子卷直径 Finish Roll Diameter | Min8m-Max200m |
| 母卷纸芯 Core Of Mother Roll | 3" |
| 子卷纸芯 Core Of Finish Roll | 定制Customized |

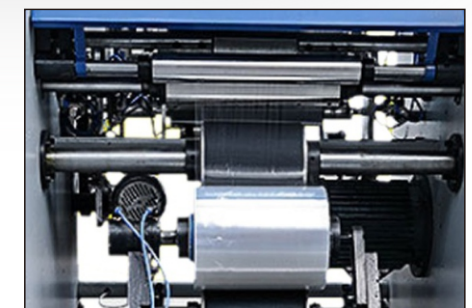

产品特点 / Features

- 五轴循环收卷, 工作效率高;
- PLC+人机界面+变频器控制系统, 操作简便;
- 纸管斗无纸管报警, 夹头无纸管自动停机, 富人性化。
- Five-axis cyclic winding, high working efficiency;
- PLC + human-machine interface + inverter control system, easy to operate;
- The paper tube hopper has no paper tube alarm, and the chuck without paper tube automatically shuts down, making it humane.

JX-500-2

二工位铝箔复卷机

Two-station aluminum foil rewinding machine

产品特点 / Features

- 本机适用于家庭铝箔, 酒店餐馆, 烧烤用的铝箔锡纸。
- 收卷外形美观大方, 平整度极高。复卷及换卷速度很快。非常适合于小型工厂的加工生产。
- This machine is suitable for household aluminum foil, hotel restaurant, barbecue aluminum foil tin foil.
- The winding shape is beautiful and generous, and the flatness is extremely high. The speed of rewinding and rewinding is very fast. Very suitable for processing and production in small factories.

技术参数 / Technical Parameters

| | | | |
|---|------------------------------------|---|--|
| 型号 Model | JX-500L-2 | 材料厚度 Material thickness | 0.008-0.05mm |
| 适用材料 Applicable materials | 铝箔 材料 aluminum foil material | 复卷速度 Rewind speed | 0-300 米/分钟 (可调) |
| 宽度 Width | 100-500mm | 放卷内径 Unwinding inner diameter | 3 英寸 (76mm) |
| 母卷最大直径 Maximum diameter of parent roll | 600mm | 主机功率 Monitor rate | 2.2 KW |
| 收卷最大直径 Maximum diameter of winding | 120mm | 设备尺寸 Equipment size | 1520 x 1250 x 1100mm |
| 收卷长度 Rewinding length | 2.5-300 米/卷 2.5-300 meters/roll | 重量 Weight | 800kg |
| | | 收卷纸管内径 Reeling paper tube inner diameter | 根据客户要求定做 (免费提供 1 套) customized according to customer requirements (1 set is provided free of charge) |



JX-500

四工位全自动铝箔打标复卷机

Four-station automatic aluminum foil marking and rewinding machine

产品用途 / Product Usage

本机适用于家庭铝箔, 酒店餐馆, 烧烤用的铝箔锡纸。
This machine is suitable for family aluminum foil, hotel restaurant, barbecue aluminum foil tin foil.

产品特点 / Features

本机组包括自动进纸管, 自动切断, 自动换卷的方式, 有效的提高生产效率, 并且节约了劳动成本。是家用铝箔复卷的理想设备。本机的特点如下:
The unit includes automatic paper feeding tube, automatic cutting and automatic roll change, which effectively improves production efficiency and saves labor costs. It is the ideal equipment for household aluminum foil rewinding. The characteristics of this machine are as follows:

- 采用变频控制, 可调速度0-180m/min.
- 收卷和换卷速度快, 生产效率高.
- 全自动PLC 控制, 所有的程序在触摸屏完成操作.
- 本机噪音小, 速度快, 寿命长.
- 客户如果需要更换纸管的大小, 只需要更换夹头的尺寸。相比传统的锡纸复卷机, 本机占地面积小, 换卷效率高, 操作简单, 系统先进, 极大提升生产的效率。



- Adopt frequency conversion control, adjustable speed 0-180m/min.
- Fast winding and rewinding speed and high production efficiency.
- Fully automatic PLC control, all procedures are completed on the touch screen.
- The machine has low noise, fast speed and long life.
- If the customer needs to change the size of the paper tube, he only needs to change the size of the chuck. Compared with the traditional tin foil rewinding machine, this machine has a small footprint, high reeling efficiency, simple operation and advanced system, which greatly improves the production efficiency.

| | | | |
|------------------------------------|---------------------|-------------|-------------|
| 型号 Model | JX-450L-4 | JX-500L-4 | JX-550L-4 |
| 薄膜宽度 Film width | 280-450mm | 280-500mm | 280-550mm |
| 薄膜厚度 Membrane thickness | 0.01-0.05mm | 0.01-0.05mm | 0.01-0.05mm |
| 收卷的宽度 Rewinding width | 280-450mm | 280-500mm | 280-550mm |
| 母卷的直径 Parent roll diameter | 600mm | 600mm | 600mm |
| 收卷长度 Rewinding length | 2.5-50米/卷 | 2.5-50米/卷 | 2.5-50米/卷 |
| 复卷速度 Rewind speed | 0-180m/min | 0-180m/min | 0-180m/min |
| 换卷方式 Roll change method | 全自动 Automatic | | |
| 母卷纸管直径 Paper tube diameter | 3" | | |
| 收卷的纸管直径 Reeled paper tube diameter | 根据客户要求定做 Customized | | |
| 输送带 Conveyor | 包括 Include | | |