



**AUTOMOTIVE**  
汽车应用



SOLUTIONS THAT MAKE  
THE DIFFERENCE  
带来改变的解决方案

# OUR COMPANY

BENEFITS IN ALL SHAPES AND SIZES

## 我们的公司

致力为各行各业提供优质热塑性弹性体 (TPE) 产品

Thermoplastic Elastomers (TPEs) are the materials used to make progress. Compounds from KRAIBURG TPE will open up all sorts of new opportunities in product development and processing making production efficient for you as well.

The solutions provided by KRAIBURG TPE will enable you to meet the highest requirements. Our company not only offers high-quality specially custom-engineered products, but also provides a unique level of comprehensive customer service.

The company's motto, "CUSTOM-ENGINEERED TPE AND MORE", is meant to be taken literally. Our goal is to identify the challenges you face with you and support you at all times anywhere in the world.

热塑性弹性体 (TPE) 是实现产品改进的重要材料。凯柏胶宝® 的化合物将为产品开发和加工开辟出全新的可能，让您的生产效率更加出色。

凯柏胶宝® 的TPE解决方案将竭力满足您的全部要求。我们公司不仅提供高品质的特殊定制产品，还用心提供全面而独家的客户服务。

公司一言一行，都在贯彻“不只是定制 TPE”的座右铭。我们的目标是：与您携手，明确当前挑战，在世界各地随时随地为您提供支持。



Regional Headquarters  
区域总部

Buford (GA) USA  
布福德(乔治亚州)/美国



Headquarters  
总部

Waldkraiburg GERMANY  
瓦尔德克赖堡/德国



Regional Headquarters  
区域总部

Kuala Lumpur MALAYSIA  
吉隆坡/马来西亚





## THE MARKET

PIONEERING APPLICATIONS

### 市场

引领应用先锋

---

Some of our TPE compounds have now become indispensable in the automotive industry. The well-established portfolio series meet the highest requirements. In addition, the materials can be adjusted to meet customers' needs. For many years we have been collaborating with OEMs and suppliers on clearances for components and materials. This means: With KRAIBURG TPE, you are not just getting a supplier, you are getting a partner.

Our thermoplastic elastomers that have been specifically developed for the automotive industry are also used for alternative drive systems. Our lightweight materials enable you to set new standards for weight reduction and provide you with the right compounds for new mobility applications.

我们的许多TPE化合物已成为汽车部件生产必不可少的材料。品类丰富的产品系列能够轻松满足客户形形色色的需求。此外，我们还可以根据客户需求灵活调整提供定制化服务。多年来，我们始终做到与原始设备制造商和供应商保持密切的合作，从而解决零部件和材料供应之间可能存在的间隙。因此，选择凯柏胶宝®，您将拥有的不仅是一个供应商，更是一个共同发展的密切合作伙伴。

我们为汽车行业开发的热塑性弹性体也可应用于可替换驱动系统。轻质的TPE材料将刷新您对汽车轻量化的标准，并提供适合新型移动应用的理想化合物。

# EXTERIOR

## MATERIAL BENEFITS THAT ARE IMPRESSIVE

### 汽车外饰

卓越的材料优势

Quality and aesthetics are key properties for automotive exteriors. Our TPEs not only offer effective processing and low mold cavity pressure, but also provide excellent weather and UV resistance.

质量和美观是汽车外饰的两大关键特性。我们的 TPE 不仅支持高效加工和低模腔压力，还具有出色的耐候性和抗紫外线性能。

#### PROPERTIES

- Adhesion to EPDM
- Efficient processing in multi-component injection molding, excellent adhesion to PP, ASA, PC, PC/ABS, PMMA, etc.
- High surface quality
- Weather and UV resistant

#### 产品特性

- 对 EPDM 的包胶性能
- 高效多组分注塑成型加工，对 PP, ASA, PC, PC/ABS 和 PMMA 等具有极佳的包胶性。
- 出色的表面触感
- 耐候性和抗紫外线性能

#### OEM APPROVALS INCLUDE | OEM 认证包括

- 03-10-104 (Renault)
- B62 0300 (PSA)
- DBL 5562, DBL 5422 (Daimler)
- GMW 15702, GMW 16233 (GM)
- GS 93042 (BMW)
- MS-DC-242 (FCA)
- STJLR.51.5306 (JLR)
- TM-1010 (Tesla)
- VW 50123, TL 52622 (VW)
- WSS-M2D505, WSS-M2D517 (Ford)



#### APPLICATIONS

#### 应用

- Antenna gaskets
- Covers for A/B/C pillars
- Multi-component door sealings
- Roof rails base pads
- Step pads, spoilers
- Water deflectors
- Window encapsulations
- Window sealing systems (corner moldings and end caps)
- Windshield cowl covers
- 天线垫片
- A/B/C 柱罩
- 多组分门密封件
- 车顶导轨底座垫
- 脚垫、扰流板
- 导水板
- 车窗密封条
- 车窗密封系统 (角压条和端盖)
- 挡风玻璃罩

# INTERIOR

SWITCHING TO DESIGN AND COMFORT

## 汽车内饰

设计感和舒适性完美融合

In automotive interiors, TPEs ensure a pleasant surface feel with their soft-touch elements & reduce disturbing rattling and creaking noises when used for damping elements. With our low-emission TPE solutions, we meet the high OEM requirements for the automotive interior.

在汽车内饰领域，我们的 TPE 材料用于制作软质触感元件，可提供制品舒适的表面触感；用于制作阻尼元件可达到降噪效果；此外低排放 TPE 解决方案还能满足高端 OEM 对汽车内饰应用的环保和安全要求。

### PROPERTIES

- Adhesion to PP, ABS, ABS/PC, PA
- Dry and visually appealing surfaces with optimized touch
- Low VOC and fogging values
- Meets all the OEMs odor requirements
- Precise material color matching

### 产品特性

- 对 PP, ABS, ABS/PC 和 PA 的包胶性能
- 干爽美观的表面更有绝佳的触感
- 低 VOC 和雾化值
- 满足 OEM 在气味方面的所有要求
- 精准的材料配色

### OEM APPROVALS INCLUDE | OEM 认证包括

- 03-10-104 (Renault)
- B62 0300 (PSA)
- DBL 5562 (Daimler)
- GMW 15702, GMW 17374, GMW 14722 (GM)
- GS 93042 (BMW)
- MS-DC-242 (FCA)
- STJLR.51.5306 (JLR)
- TM-1010 (Tesla)
- VW 50123 (VW)
- WSS-M2D507 (Ford)



### APPLICATIONS

#### 应用

- Adjusting lever for steering wheel and seat
- Buffering and damping elements
- Cable sleeves
- Cup holders
- Door sill panels
- Floor mats
- Gearshifts
- HVAC sealings
- Shelf mats
- Thumb wheels/sliders
- 方向盘和座椅调节杆
- 缓冲和阻尼元件
- 线缆套管
- 杯架
- 门槛板
- 地毯
- 变速排档
- HVAC 密封件
- 搁板垫
- 拇指旋轮/滑块

# POWERTRAIN

SUPERIOR CHARACTERISTICS EVEN UNDER THE HOOD

## 动力系统

特殊应用，体现更优特性

With engine compartments becoming increasingly complex, our TPEs offer economical alternatives to conventional materials. Our compounds that have been specially developed for the automotive industry can be cost-effectively processed in multi-component injection molding. They exhibit optimal long-term stability when exposed to high temperatures and when in contact with motor oils and greases.

随着发动机舱结构越来越复杂，我们的 TPE 成为了替代传统材料且经济的理想之选。凯柏胶宝® 专为汽车行业开发的化合物，不仅能够实现极具成本效益的多组分注塑成型加工；而且，在高温、接触机油/润滑油脂的环境下，该系列 TPE 材料表现出长久的极佳稳定性。

### PROPERTIES

- Adhesion – e.g., to PA, PP, POM, PBT
- Chemical stability to substances such as oils, greases, AdBlue and fuels
- Excellent deformation recovery
- High temperature resistance

### 产品特性

- 包胶性，可粘合至 PA, PP, POM, PBT
- 对油、油脂、车用尿素和燃料等物质具有化学稳定性
- 出色的变形恢复性能
- 耐高温

### OEM APPROVALS INCLUDE | OEM 认证包括

- 03-10-104 (Renault)
- B62 0300 (PSA)
- DBL 5562 (Daimler)
- GMW15702 (GM)
- GS 93042 (BMW)
- MS-DC-242 (FCA)
- VW 50123 (VW)
- WSS-M2D516 (Ford)



### APPLICATIONS



#### 应用

- Air duct components, ventilation flap controls
- Battery seals
- E-box gaskets
- Grommet
- Mounting elements
- Sealings in oil management
- Tank recesses
- Timing belt covers
- Vibration control elements in the transmission
- 风道部件、通风阀控件
- 电池密封
- 电子箱垫圈
- 垫圈
- 安装元件
- 油耗管理密封件
- 油箱凹槽
- 正时皮带盖
- 传动系统的振动控制元件

# NEW MOBILITY

## LOOKING TO THE FUTURE

### 适用于移动出行新方式 面向未来

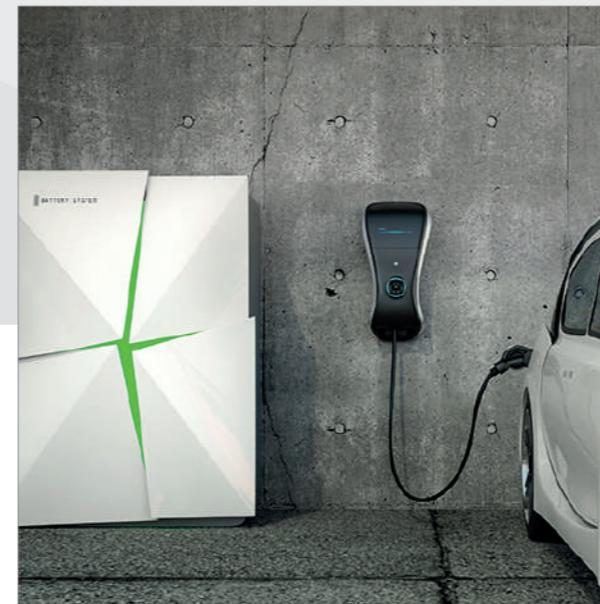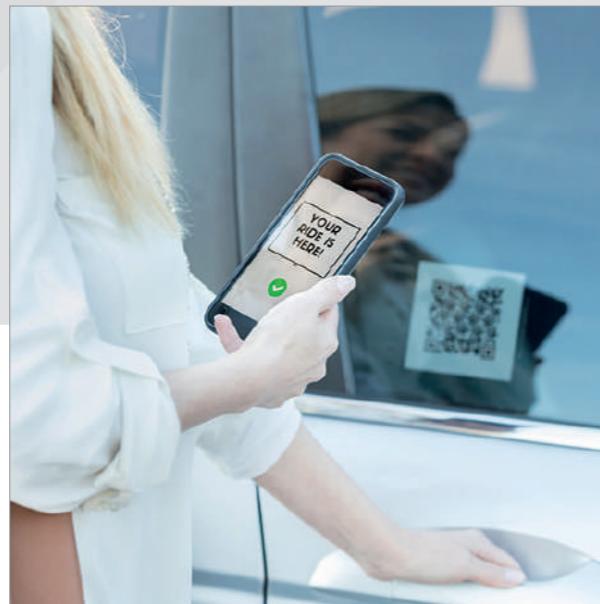

#### AUTONOMOUS DRIVING 自动驾驶

In autonomous driving, the interior becomes an experience, with TPEs providing that special added value and serving for noise reduction and for visual or touch elements, for example.

在自动驾驶过程中，汽车内饰对驾驶体验的影响更重要，TPE 依靠降噪、卓越的视觉和触摸感等特性，可为汽车带来更多附加值。

#### CAR SHARING 共享出行

Representation of durable designs: Our TPEs are convincing with their reproduction of fine surface structures and resistance to various antibacterial cleaning chemicals.

耐久设计的典范：我们的内饰应用 TPE 材料具有出色的表面结构再生性，可抵抗各种抗菌清洁化学品。

#### E-MOBILITY 电动汽车

Resistance to coolants, vibration protection and flame retardancy are only some of the challenges that need to be faced in electromobility. We have the right portfolio for your application – just get in touch with us.

电动汽车行业面临许多挑战，产品对材料提出耐冷却剂、防震和阻燃性等要求，但不止于此。凯柏胶宝® 可为您提供理想的产品组合——敬请随时联系。

#### NEXT MOBILITY 未来出行

Whatever the future has in store – we are ready. Many years of experience in a wide variety of markets make us your perfect partner for all new forms of mobility – whether in the air, in the water or on the road.

无论未来如何变化——我们做好准备迎接挑战。凯柏胶宝® 拥有多年服务于各行各业的市场经验和专业技术，选择我们，您将拥有一位携手前行的绝佳搭档。

# CUSTOM-ENGINEERED PROPERTIES

WHAT ARE YOUR REQUIREMENTS?

## 定制设计解决方案

产品要求，您说了算

The TPE solutions are as multifaceted as the industry itself. Our compounds are established atop the industry in different sectors. For us, there is no such thing as a niche market.

Tell us about the challenges you may be facing while implementing your product idea and we will be pleased to help you improve your product's quality and functionality.

Have we left anything out that you need? Then feel free to contact us.

我们提供应用于各个行业的 TPE 解决方案。如今，我们的化合物已在这些行业中获得了良好的口碑。对于我们而言，所有市场，无论规模大小，都是我们认真探索和服务的对象。

请告诉我们您的产品创意落地时遇到的障碍，我们将努力帮助您改善产品的质量和功能。

还有其他需求？请随时与我们联系。





# SERVICE

GOOD ADVICE IS INCLUDED

## 服务

中肯建议，与您同行

Your satisfaction is the standard we set for our work. To ensure the highest level of customer satisfaction, we have developed a quality assurance approach that covers the products, processes, and people involved. Our laboratories are designed and equipped to follow the latest state of the art technology.

In other words: you can tell us what challenges you are facing and we will dedicate ourselves to finding the best possible solution. Custom-engineered and extremely high-quality compounds provide the basis for this.

In addition, you will be able to benefit from our technical expertise, built up over many years of experience. Thanks to personal on-site consulting and unique global customer service, you will be able to enjoy the maximum support.

您的满意是我们的宗旨。为确保客户绝对的满意度，我们制定出了一项涵盖产品、加工和人员的质量保证方针。另外，我们拥有精心设计、设备齐全的实验室，以及最先进的技术。

简而言之，您只需告诉我们您所面临的挑战，凯柏胶宝® 将竭力提供定制设计和优质产品，为您给出理想的解决方案。

此外，我们在材料领域深耕多年所获得的丰富经验以及精进的技术专长，也能让你获益。依靠现场面对面咨询和独特的全球化客户服务，我们将为您提供最强大的支持。

# SUSTAINABILITY

ALWAYS LOOKING TO THE FUTURE

## 可持续发展

立足当下，着眼未来

Sustainability is not just a buzzword at KRAIBURG TPE, it is a principle we live by. With us you are choosing a partner who takes on responsibility for the environment and society. Today and tomorrow. For example, we do not use palm oil in the materials we produce.

### **Our compounds are PVC-free, halogen-free and recyclable.**

- Certified worldwide in accordance with ISO 14001 and ISO 9001
- Headquarters in Germany certified in accordance with ISO 50001
- EH&S management, reporting & auditing
- Systematic energy management
- Annually renewed environmental protection and occupational safety program
- Selection of raw materials suppliers based on quality and environmental impact

在凯柏胶宝®，可持续发展不仅仅是一个时下流行的概念，更是我们身体力行的原则。选择我们，您将会拥有一位对环境、对社会有责任有担当的合作伙伴，不止当下，还有未来。例如，我们生产的材料中不会使用棕榈油。

### **我们的化合物中不含PVC、卤素，并且可以回收利用。**

- 全球所有生产基地皆符合 ISO 14001 和 ISO 9001 认证标准
- 德国总部符合 ISO 50001 认证标准
- EH&S 管理、报告和审计
- 系统的能源管理
- 每年更新环境保护和职业安全计划
- 根据质量和环境影响选择原材料供应商



# TPE PORTFOLIO SERIES

## AUTOMOTIVE SECTOR

### TPE 产品系列

#### 汽车应用

热塑宝 K THERMOLAST® K	包胶材料 Adhesion Materials
AD1	ABS, PC, PC/ABS
AD1/AP	ABS, PC, PC/ABS
AD1/CS	ABS, PC, PC/ABS, PBT
AD/PA	PA
AD/PA/CS	PA
AD/PA/CS2	PA
AD/POM	POM
FG/SF	PP
GP/FG	PP
LW/CS/UV	PP
LW/PA	PA
LW/UV	PP
SCR/AP	PP
UV/AD2	ABS, ASA, PC, PC/ABS, PMMA
UV/AP	PP
UV/FG	PP
UV/HF	PP
UV/HF/SF	PP
UV/LD/b	PP
VS/AD/HM	ABS, ASA, PA, PC, PC/ABS, SAN

热塑宝 V THERMOLAST® V	包胶材料 Adhesion Materials
LTP	PP
LTP/PA	PA

尼塑宝 ® For Tec E ®	包胶材料 Adhesion Materials
AD/PAX/CR	PA

### THERMOLAST® K | 热塑宝 K

#### Series 系列

#### AD1

The AD1 series is your material solution for applications with adhesion to polar thermoplastics such as ABS, PC and PC/ABS. The compounds are available in black and natural colors. Natural color variants can be colored in many different ways.

AD1 系列材料解决方案适用于包胶极性热塑性材料（如 ABS、PC 和 PC/ABS）应用。这类化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Extrusion, Injection Molding | 加工方法 : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxMLB		50 – 80 Shore A		Natural	本色		
TCxMLZ		50 – 80 Shore A		Black	黑色		ABS, PC, PC/ABS
TCxMSB		30 – 40 Shore A		Natural	本色		
TCxMSZ		30 – 40 Shore A		Black	黑色		

#### Typical Applications

- Bumpers
- Door sills
- Function and design elements
- Grommets
- Handles
- Seals
- Soft touch surface (thumb wheels, push buttons, switches)
- Thumb wheels

#### 典型应用

- 保险杠
- 门槛
- 功能和设计要素
- 垫圈
- 手柄
- 密封件
- 软质表面（拨轮、按键、开关）
- 拨轮

#### Material Advantages

- Adhesion to PC, ABS, PC/ABS, ASA, SAN
- Colorable
- Controlled level of emission & odor, suitable for automotive interior
- Insert molding possible
- Soft touch surface
- Soft, non-sticky haptic

#### 材料属性

- 包胶 PC、ABS、PC/ABS、ASA、SAN
- 可染色
- 可控的排放和气味水平，适合汽车内饰
- 可嵌入成型
- 柔软的表面触感
- 柔软不粘的触感

#### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- BMW GS 93042
- DIN 75201-B - Fogging
- DIN EN ISO 105-B06 Method 3
- Ford WSS-M2D507
- Mercedes-Benz DBL 5562
- PSA B62 0300
- Renault 03-10-104
- UL 94 HB
- VDA 270 B3 - Odor
- VW 50123

#### 法规 / 批准

- 49 CFR §571.302 (FMVSS 302)
- 宝马 GS 93042
- DIN 75201-B - 雾化值
- DIN EN ISO 105-B06 Method 3
- 福特 WSS-M2D507
- 奔驰 DBL 5562
- PSA B62 0300
- 雷诺 03-10-104
- UL 94 HB
- VDA 270 B3 - 气味
- VW 50123

### THERMOLAST® K | 热塑宝 K

#### Series 系列

#### AD1/AP

The AD1/AP series is your material solution for automotive interior applications with adhesion to polar thermoplastics such as ABS, PC and PC/ABS for Asia Pacific Market. The compounds are available in black colors.

AD1/AP 系列适用于亚太市场汽车内饰的材料解决方案，包胶极性热塑性塑料（如 ABS, PC）。这些化合物有黑色可供选择。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxPGG-BLCK		60 – 80 Shore A		Black	黑色		ABS, PC, PC/ABS

#### Typical Applications

- Automotive Interior
- Bumpers
- Car mats
- Door sills
- Function and design elements
- Grommets
- Handles
- Seals
- Soft touch surface (thumb wheels, push buttons, switches)
- Thumb wheels

#### 典型应用

- 汽车内饰
- 保险杠
- 车垫
- 门槛
- 功能和设计要素
- 垫圈
- 手柄
- 密封件
- 软质表面（拨轮、按键、开关）
- 拨轮

#### Material Advantages

- Adhesion to PC, ABS, PC/ABS
- Automotive Interior UV Resistance
- Controlled level of emission & odor, suitable for automotive interior
- In-process recycling possible
- Insert molding possible
- Soft touch surface
- Temperature stability up to 90 °C

#### 材料属性

- 包胶 PC、ABS、PC/ABS
- 适用于汽车内饰，具有抗紫外线性能
- 可控的排放和气味水平，适合汽车内饰
- 可在制造过程中回收利用
- 可嵌入成型
- 柔软的表面触感
- 90 °C下的温度稳定性

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### AD1/CS

The AD1/CS series is your material solution for applications with optimized compression set and adhesion to polar thermoplastics such as ABS, PC, PC/ABS and PBT. The compounds are available in black and natural colors. Natural color variants can be colored in many different ways.

AD1/CS 系列材料解决方案适用于要求出色的压缩永久变形性能和包胶极性热塑性材料（如 ABS、PC、PC/ABS 和 PBT）的应用。这类化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Extrusion, Injection Molding | 加工方法 : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TPxVCN		50 – 75 Shore A		Natural	本色		
TPxVCZ		50 – 80 Shore A		Black	黑色	ABS, PC, PC/ABS, PBT	

### Typical Applications

- Bumpers
- Cable clips
- Function and design elements
- Grommets
- Seals
- Soft touch surface (thumb wheels, push buttons, switches)

### Material Advantages

- Adhesion to PBT
- Adhesion to PC, ABS, PC/ABS, ASA, SAN
- Optimized compression set
- Optimized mechanical properties

### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- BMW GS 93042
- Mercedes-Benz DBL 5562
- PSA B62 0300
- UL 94 HB
- VW 50123

### 典型应用

- 保险杠
- 缆线卡钩
- 功能和设计要素
- 垫圈
- 密封件
- 软质表面（拨轮、按键、开关）

### 材料属性

- 包胶 PBT
- 包胶 PC、ABS、PC/ABS、ASA、SAN
- 出色的压缩永久变形性能
- 优异的机械特性

### 法规 / 批准

- 49 CFR §571.302 (FMVSS 302)
- 宝马 GS 93042
- 奔驰 DBL 5562
- PSA B62 0300
- UL 94 HB
- VW 50123

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### AD/PA/CS

The AD/PA/CS series is your material solution for applications with adhesion to PA and sealing function. The compounds are available in black and natural colors. Natural color variants can be colored in many different ways.

AD/PA/CS 系列材料解决方案适用于包胶 PA 和密封功能应用。这类化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxPCN		40 – 80 Shore A		Natural	本色		
TCxPCZ		35 – 75 Shore A		Black	黑色	PA	

### Typical Applications

- Cable clips
- Fastenings
- Grommets
- Membranes
- Seals

### Material Advantages

- Adhesion to PA6 and PA6.6, up to 50% glass fiber
- Optimized compression set
- Optimized flow properties
- Temperature stability up to 90 °C

### Regulations / Approvals

- BMW GS 93042
- GM GMW15702
- Mercedes-Benz DBL 5562
- PSA B62 0300
- Renault 03-10-104
- UL 94 HB
- VW 50123

### 典型应用

- 缆线卡钩
- 紧固件
- 垫圈
- 薄膜
- 密封件

### 材料属性

- 包胶 PA6 和 PA6.6，玻璃纤维高达 50%
- 出色的压缩形变特性
- 优异的流动性
- 90 °C下的温度稳定性

### 法规 / 批准

- 宝马 GS 93042
- 通用汽车 GMW15702
- 奔驰 DBL 5562
- PSA B62 0300
- 雷诺 03-10-104
- UL 94 HB
- VW 50123

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### AD/PA

The AD/PA series is your material solution for applications with adhesion to PA. The compounds are available in black and natural colors. Natural color variants can be colored in many different ways.

AD/PA 系列材料解决方案适用于包胶 PA 应用。这类化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxPAN		20 – 80 Shore A		Natural	本色		
TCxPAZ		20 – 80 Shore A		Black	黑色	PA	

### Typical Applications

- Cable clips
- Function and design elements
- Grommets
- Handles
- Thumb wheels

### Material Advantages

- 包胶 PA6 和 PA6.6, 玻璃纤维高达 50%
- 包胶 PA12
- 可染色
- 干爽触感
- 不含卤素（符合 IEC 61249-2-21 标准）
- 90 °C下的温度稳定性

### 法规 / 批准

- 49 CFR §571.302 (FMVSS 302)
- 宝马 GS 93042
- DIN 75201-B - Fogging
- DIN EN ISO 105-B06 Method 3
- 通用汽车 GMW15702
- 奔驰 DBL 5562
- PSA B62 0300
- 雷诺 03-10-104
- UL 94 HB
- VW 50123

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### AD/PA/CS2

The AD/PA/CS2 Series is your material solution for applications with excellent adhesion to PA as well as outstanding compression set. The compounds are available in natural and black colors. Natural color variants can be colored in many different ways.

AD/PA/CS2 系列材料解决方案适用于对 PA 有卓越包胶性和出色压缩形变性能的应用领域。这类化合物有黑色和本色可选。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxPRN		40 – 80 Shore A		Natural	本色		
TCxPRZ		40 – 80 Shore A		Black	黑色	PA	

### Typical Applications

- Cable clips
- Fastenings
- Grommets
- Membranes
- Seals

### Material Advantages

- Adhesion to PA6 and PA6.6, up to 50% glass fiber
- Optimized compression set
- Optimized mechanical properties
- Temperature stability up to 100 °C

### Regulations / Approvals

- Mercedes-Benz DBL 5562
- PV 3930 Florida (2 years) – Weathering Test
- UL 94 HB

### 典型应用

- 缆线卡钩
- 紧固件
- 垫圈
- 薄膜
- 密封件

### 材料属性

- 包胶 PA6 和 PA6.6，玻璃纤维高达 50%
- 出色的压缩永久变形性能
- 优异的机械特性
- 100 °C下的温度稳定性

### 法规 / 批准

- 奔驰 DBL 5562
- PV 3930 佛罗里达试验（2 年）- 耐候性测试
- UL 94 HB

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### AD/POM

Processing Method : Extrusion, Injection Molding | 加工方法 : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxHAA		50 – 80 Shore A		Natural	本色		
TCxHAZ		50 – 80 Shore A		Black	黑色		POM
TCxHBA		60 – 70 Shore A		Natural	本色		
TCxHBZ		60 – 70 Shore A		Black	黑色		

#### Typical Applications

- Bumpers
- Function and design elements
- Handles
- Thumb wheels

#### Material Advantages

- Adhesion to POM
- Colorable
- Soft touch surface

#### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- BMW GS 93042
- DIN 75201-B – Fogging
- DIN EN ISO 105-B06 Method 3
- GM GMW15702
- Mercedes-Benz DBL 5562
- Renault 03-10-104
- VDA 270 B3 – Odor
- VW 50123

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### FG/SF

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxFEZ		50 – 80 Shore A		Black	黑色	PP	

#### Typical Applications

- Automotive Interior
- Bumpers
- Car mats
- Function and design elements
- Grip applications
- Over molded housing
- Soft touch for grips, switches and mats
- Soft touch surface (thumb wheels, push buttons, switches)

#### Material Advantages

- Abrasion resistance
- Adhesion to PP
- Colorable
- Controlled level of emission & odor, suitable for automotive interior
- Low density
- Non-sticky surface
- Optimized flow properties
- Soft touch surface

#### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- BMW GS 93042
- DIN 75201-B – Fogging
- DIN EN ISO 105-B06 Method 3
- Mercedes-Benz DBL 5562
- VDA 270 B3 – Odor
- VW 50123

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### GP/FG

Processing Method : Extrusion, Injection Molding | 加工方法 : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxGPN		20 – 90 Shore A / 32 Shore D		Natural	本色		
TCxGPZ		20 – 90 Shore A / 33 Shore D		Black	黑色	PP	

#### Typical Applications

- Bumpers
- Car mats
- Function and design elements
- Handles
- Soft touch surface (thumb wheels, push buttons, switches)

#### Material Advantages

- Adhesion to PP
- Colorable
- Controlled level of emission & odor, suitable for automotive interior
- Dry haptics
- Halogen-free (according to IEC 61249-2-21)
- In-process recycling possible
- Optimized mechanical properties
- Soft touch surface

#### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- BMW GS 93042
- DIN 75201-B – Fogging
- DIN EN ISO 105-B06 Method 3
- Ford WSS-M2D507
- Ford WSS-M2D516
- GM GMW15702
- Mercedes-Benz DBL 5562
- PSA B62 0300
- PV 3929 Kalahari (1 year) – Weathering Test
- PV 3930 Florida (1 year) – Weathering Test
- Renault 03-10-104
- UL 94 HB
- VDA 270 B3 – Odor
- VW 50123

#### 材料属性

- 包胶 PP
- 可染色
- 可控的排放和气味水平, 适合汽车内饰
- 干爽触感
- 不含卤素 (符合 IEC 61249-2-21 标准)
- 可在制造过程中回收利用
- 优异的机械特性
- 柔软的表面触感

#### 法规 / 批准

- 49 CFR §571.302 (FMVSS 302)
- 宝马 GS 93042
- DIN 75201-B - 雾化值
- DIN EN ISO 105-B06 Method 3
- 福特 WSS-M2D507
- 福特 WSS-M2D516
- 通用汽车 GMW15702
- 奔驰 DBL 5562
- PSA B62 0300
- PV 3929 卡拉哈里试验 (1年) - 耐候性测试
- PV 3930 佛罗里达试验 (1年) - 耐候性测试
- 雷诺 03-10-104
- UL 94 HB
- VDA 270 B3 - 气味
- VW 50123

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxFEZ		50 – 80 Shore A		Black	黑色	PP	

#### Typical Applications

- 汽车内饰
- 保险杠
- 车垫
- 功能和设计要素
- 把手应用
- 包覆成型机壳
- 把手、开关和橡胶垫的柔软触感
- 软质表面 (拨轮、按键、开关)

#### Material Advantages

- 耐磨性
- 包胶 PP
- 可染色
- 可控的排放和气味水平, 适合汽车内饰
- 低密度
- 不粘表面
- 优异的流动性
- 软质表面

#### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- 宝马 GS 93042
- DIN 75201-B – Fogging
- DIN EN ISO 105-B06 Method 3
- 奔驰 DBL 5562
- VDA 270 B3 – Odor
- VW 50123

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### LW/CS/UV

The LW/CS/UV Series is your lightweight material solution for applications with superior requirements on sealing performance. The compounds are especially suited for automotive exterior applications. They are available in black colors.

LW/CS/UV 系列具有轻质和高密封性的特点，是满足严格行业要求的理想材料选择。这些化合物尤其适用于汽车外饰应用。该系列的颜色为黑色。

Processing Method : Extrusion, Injection Molding | 加工方法 : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TLxOCW-BLCK		35 – 75 Shore A		Black	黑色	PP	

### Typical Applications

- Automotive Exterior
- Cowls gaskets
- Door sills
- Glass Run Channel
- Grommets
- Seals

### Material Advantages

- Adhesion to PP
- In-process recycling possible
- Low density
- Non-sticky surface
- Optimized compression set
- Resilience
- UV and weathering resistance

### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- Mercedes-Benz DBL 5562
- PV 3929 Kalahari (1 year) – Weathering Test
- PV 3929 Kalahari (2 years) – Weathering Test
- PV 3930 Florida (1 year) – Weathering Test
- PV 3930 Florida (2 years) – Weathering Test
- VW 50123

### 典型应用

- 汽车外饰
- 通风隔栅垫片
- 门槛
- 车窗玻璃导槽
- 垫圈
- 密封件

### 材料属性

- 包胶 PP
- 可在制造过程中回收利用
- 低密度
- 不粘表面
- 出色的压缩永久变形性能
- 回弹性
- 抗紫外线和耐候性

### 法规 / 批准

- 49 CFR §571.302 (FMVSS 302)
- 奔驰 DBL 5562
- PV 3929 卡拉哈里试验 (1 年) - 耐候性测试
- PV 3929 卡拉哈里试验 (2 年) - 耐候性测试
- PV 3930 佛罗里达试验 (1 年) - 耐候性测试
- PV 3930 佛罗里达试验 (2 年) - 耐候性测试
- VW 50123

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### LW/UV

The LW/UV Series is your lightweight material solution for applications with high UV- and weathering resistance, especially in automotive exterior. The compounds are available in black colors.

LW/UV 系列具有轻质、抗紫外线和耐候性的特点，是满足严格行业要求的理想材料选择，尤其适合汽车外饰应用。该系列的颜色为黑色。

Processing Method : Extrusion, Injection Molding | 加工方法 : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TLxOWG-BLCK		60 – 80 Shore A		Black	黑色	PP	

### Typical Applications

- Automotive Exterior
- Bumpers
- Door sills
- Edge guards
- Function and design elements
- Roof racks
- Soft touch
- Water deflectors
- Window encapsulations

### Material Advantages

- Adhesion to PP
- In-process recycling possible
- Low density
- Non-sticky surface
- UV and weathering resistance

### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- Mercedes-Benz DBL 5562
- PV 3929 Kalahari (1 year) – Weathering Test
- PV 3929 Kalahari (2 years) – Weathering Test
- PV 3930 Florida (1 year) – Weathering Test
- PV 3930 Florida (2 years) – Weathering Test

### 典型应用

- 汽车外饰
- 保险杠
- 门槛
- 防撞角
- 功能和设计要素
- 车顶架
- 软触感
- 导水器
- 窗密封件

### 材料属性

- 包胶PP
- 可在制造过程中回收利用
- 低密度
- 不粘表面
- 抗紫外线和耐候性

### 法规 / 批准

- 49 CFR §571.302 (FMVSS 302)
- 奔驰 DBL 5562
- PV 3929 卡拉哈里试验 (1 年) - 耐候性测试
- PV 3929 卡拉哈里试验 (2 年) - 耐候性测试
- PV 3930 佛罗里达试验 (1 年) - 耐候性测试
- PV 3930 佛罗里达 (2 年) - 耐候性测试

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### LW/PA

The LW/PA Series is your lightweight material solution for applications with adhesion to PA. The compounds are available in black colors.

LW/PA 系列具有轻质和 PA 包胶的特点，是满足相关领域应用的理想材料选择。可选黑色。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TLxNGG-BLCK		50 – 70 Shore A		Black	黑色	PA	

### Typical Applications

- Bumpers
- Function and design elements
- Grip applications
- Soft touch

### Material Advantages

- Adhesion to PA6 and PA12
- Dry haptic
- Low density
- Soft, non-sticky haptic

### 典型应用

- 保险杠
- 功能和设计要素
- 把手应用
- 软触感

### 材料属性

- 包胶 PA6 和 PA12
- 干爽触感
- 低密度
- 柔软不粘的触感

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### SCR/AP

The SCR/AP series is your material solution for applications with scratch resistance requirements for the Asia Pacific market. The series is characterized by a pleasant feel to the touch. The compounds are available in natural colors and can be colored in many different ways.

SCR/AP 系列材料解决方案适用于耐刮擦应用，适用于亚太市场。该系列材料具有触感舒适的特点。这类化合物为本色，可用多种不同方式着色。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxSCE		30 – 80 Shore A		Natural	自然色	PP	

### Typical Applications

- Car mats
- Function and design elements
- Handles
- Soft touch surface (thumb wheels, push buttons, switches)

### Material Advantages

- Abrasion resistance
- Adhesion to PP
- Colorable
- Controlled level of emission & odor, suitable for automotive interior
- Optimized mechanical properties
- Soft, velvety feel

### 典型应用

- 车垫
- 功能和设计要素
- 手柄
- 软质表面（拨轮、按键、开关）

### 材料属性

- 耐磨性
- 包胶 PP
- 可染色
- 可控的排放和气味水平，适合汽车内饰
- 优异的机械特性
- 天鹅绒般柔软触感

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### UV/AD2

The UV/AD2 series is your material solution for applications requiring UV resistance and adhesion to polar thermoplastics such as PC, ABS, PC/ABS, ASA and PMMA. It is particularly suitable for automotive exterior applications. The compounds are available in black.

UV/AD2 系列材料解决方案适用于抗紫外线和包胶极性热塑性塑料材料（如 PC、ABS、PC/ABS、ASA 和 PMMA）应用。该系列尤其适用于汽车外饰。这类化合物为黑色。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxMUZ		55 – 85 Shore A		Black	黑色	PC, ABS, PC/ABS, ASA, PMMA	

### Typical Applications

- A/B/C/D cappings and covers
- Door sills
- Front triangles
- Rear spoilers
- Roof rim covers
- Trunk openers
- Water deflectors
- Window encapsulations

### Material Advantages

- Adhesion to PC, ABS, PC/ABS, ASA, SAN
- Optimized flow properties
- Optimized mechanical properties
- Surface mapping
- Temperature stability up to 90 °C
- Weather resistant, suitable for automotive exterior

### Regulations / Approvals

- BMW GS 93042
- Mercedes-Benz DBL 5562
- PV 3929 Kalahari (2 years) – Weathering Test
- PV 3930 Florida (2 years) – Weathering Test
- Renault 03-10-104
- VW 50123

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### UV/AP

The UV/AP series is your material solution for applications with UV resistance requirements for Asia Pacific market. It is suitable for automotive exterior applications. The compounds are listed according to GM Standard GMW 16233 and are available in black.

UV/AP 系列材料解决方案适用于抗紫外线应用，适用于亚太市场。该系列适用于汽车外饰。该系列产品符合 GM 标准 GMW 16233，颜色为黑色。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxUVZ		50 – 70 Shore A		Black	黑色	PP	

### Typical Applications

- Roof racks
- Water deflectors
- Window encapsulations

### Material Advantages

- Adhesion to PP
- In-process recycling possible
- UV and weathering resistance
- Weather resistant, suitable for automotive exterior

### Regulations / Approvals

- GM GMW17374

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### UV/FG

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxLEZ		30 – 90 Shore A / 35 Shore D		Black	黑色	PP	

### Typical Applications

- Automotive Exterior
- Bumpers
- Cowls gaskets
- Door sills
- Function and design elements
- Roof racks
- Static window encapsulations
- Water deflectors

### Material Advantages

- Adhesion to PP
- In-process recycling possible
- Optimized flow properties
- Optimized mechanical properties
- Surface mapping
- Temperature stability up to 100 °C
- Weather resistant, suitable for automotive exterior

### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- BMW GS 93042
- GM GMW 16233
- Mercedes-Benz DBL 5562
- Outdoor Weathering Arizona 24 month SAE J1976
- Outdoor Weathering Florida 24 month SAE J1976
- PSA B62 0300
- PV 3929 Kalahari (1 year) – Weathering Test
- PV 3929 Kalahari (2 years) – Weathering Test
- PV 3930 Florida (1 year) – Weathering Test
- PV 3930 Florida (2 years) – Weathering Test
- Renault 03-10-104
- VW 50123

### 典型应用

- 汽车外饰
- 保险杠
- 通风隔栅垫片
- 门槛
- 功能和设计要素
- 车顶架
- 静态玻璃封边
- 导水器

### 材料属性

- 包胶 PP
- 可在制造过程中回收利用
- 优异的流动性
- 优异的机械特性
- 表面映射
- 100 °C下的温度稳定性
- 耐候性，适合汽车外饰

### 法规 / 批准

- 49 CFR §571.302 (FMVSS 302)
- 宝马 GS 93042
- 通用汽车 GMW 16233
- 奔驰 DBL 5562
- 室外耐候性测试 亚利桑那 24 个月 SAE J1976
- 室外耐候性测试 佛罗里达 24 个月 SAE J1976
- PSA B62 0300
- PV 3929 卡拉哈里试验 (1 年) - 耐候性测试
- PV 3929 卡拉哈里试验 (2 年) - 耐候性测试
- PV 3930 佛罗里达试验 (1 年) - 耐候性测试
- PV 3930 佛罗里达试验 (2 年) - 耐候性测试
- 雷诺 03-10-104
- VW 50123

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### UV/HF

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxWEZ		50 – 80 Shore A		Black	黑色	PP	

### Typical Applications

- Automotive Exterior
- Bumpers
- Cowls gaskets
- Door sills
- Function and design elements
- Roof racks
- Water deflectors
- Window encapsulations

### Material Advantages

- Adhesion to PP
- In-process recycling possible
- Optimized flow properties
- Surface mapping
- Weather resistant, suitable for automotive exterior

### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- BMW GS 93042
- DIN 75201-B – Fogging
- Ford WSS-M2D517
- Mercedes-Benz DBL 5562
- Outdoor Weathering Arizona 24 month SAE J1976
- Outdoor Weathering Florida 24 month SAE J1976
- PSA B62 0300
- PV 3929 Kalahari (1 year) – Weathering Test
- PV 3929 Kalahari (2 years) – Weathering Test
- PV 3930 Florida (1 year) – Weathering Test
- PV 3930 Florida (2 years) – Weathering Test
- Renault 03-10-104
- VDA 270 B3 - Odor
- VW 50123

### 典型应用

- 汽车外饰
- 保险杠
- 通风隔栅垫片
- 门槛
- 功能和设计要素
- 车顶架
- 导水器
- 窗密封件

### 材料属性

- 包胶 PP
- 可在制造过程中回收利用
- 优异的流动性
- 表面映射
- 耐候性，适合汽车外饰

### 法规 / 批准

- 49 CFR §571.302 (FMVSS 302)
- 宝马 GS 93042
- DIN 75201-B - 雾化值
- 福特 WSS-M2D517
- 奔驰 DBL 5562
- 室外耐候性测试 亚利桑那 24 个月 SAE J1976
- 室外耐候性测试 佛罗里达 24 个月 SAE J1976
- PSA B62 0300
- PV 3929 卡拉哈里 (1 年) - 耐候性测试
- PV 3929 卡拉哈里 (2 年) - 耐候性测试
- PV 3930 佛罗里达 (1 年) - 耐候性测试
- PV 3930 佛罗里达 (2 年) - 耐候性测试
- Renault 03-10-104
- VDA 270 B3 - 气味
- VW 50123

## THERMOLAST® K | 热塑宝 K

### Series 系列

#### UV/HF/SF

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxHFZ		50 – 90 Shore A		Black	黑色	PP	

### Typical Applications

- Static window encapsulations
- Water deflectors
- Window encapsulations

### Material Advantages

- Adhesion to PP
- In-process recycling possible
- Optimized flow properties
- Surface mapping
- Weather resistant, suitable for automotive exterior

### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- 宝马 GS 93042
- DIN 75201-B - 雾化值
- 福特 WSS-M2D517
- GM GMW 16233
- Mercedes-Benz DBL 5562
- Outdoor Weathering Arizona 24 month SAE J1976
- Outdoor Weathering Florida 24 month SAE J1976
- PSA B62 0300
- PV 3929 Kalahari (1 year) – Weathering Test
- PV 3929 Kalahari (2 years) – Weathering Test
- PV 3930 Florida (1 year) – Weathering Test
- PV 3930 Florida (2 years) – Weathering Test
- Renault 03-10-104
- VDA 270 B3 - Odor
- VW 50123

### 典型应用

- 静态玻璃封边
- 导水器
- 窗密封件

### 材料属性

- 包胶 PP
- 可在制造过程中回收利用
- 优异的流动性
- 表面映射
- 耐候性，适合汽车外饰

### 法规 / 批准

- 49 CFR §571.302 (FMVSS 302)
- 宝马 GS 93042
- DIN 75201-B - 雾化值
- 福特 WSS-M2D517
- 通用汽车 GMW 16233
- 奔驰 DBL 5562
- 室外耐候性测试 亚利桑那 24 个月 SAE J1976
- 室外耐候性测试 佛罗里达 24 个月 SAE J1976
- PSA B62 0300
- PV 3929 卡拉哈里试验 (1 年) - 耐候性测试
- PV 3929 卡拉哈里试验 (2 年) - 耐候性测试
- PV 3930 佛罗里达 (1 年) - 耐候性测试
- PV 3930 佛罗里达 (2 年) - 耐候性测试
- Renault 03-10-104
- VDA 270 B3 - 气味
- VW 50123

## THERMOLAST® K | 热塑宝 K

### Series 系列

### UV/LD/b

Processing Method : Extrusion, Injection Molding | 加工方法 : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TPxLDZ		30 – 80 Shore A / 35 Shore D		Black	黑色	PP	

### Typical Applications

- Automotive Exterior
- Cowls gaskets
- Function and design elements
- Roof racks
- Water deflectors
- Window encapsulations

### Material Advantages

- Adhesion to PP
- Heat stability
- In-process recycling possible
- Optimized compression set
- Optimized mechanical properties
- Surface mapping
- Weather resistant, suitable for automotive exterior

### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- BMW GS 93042
- DIN 75201-B – Fogging
- FCA MS-DC-242
- Ford WSS-M2D517
- GM GMW 15702
- GM GMW 16233
- Mercedes-Benz DBL 5562
- Outdoor Weathering Arizona 24 month SAE J1976
- Outdoor Weathering Florida 24 month SAE J1976
- PSA B62 0300
- PV 3929 Kalahari (1 year) – Weathering Test
- PV 3929 Kalahari (2 years) – Weathering Test
- PV 3930 Florida (1 year) – Weathering Test
- PV 3930 Florida (2 years) – Weathering Test
- Renault 03-10-104
- UL 94 HB
- VDA 270 B3 – Odor
- VW 50123

### 典型应用

- 汽车外饰
- 通风隔栅垫片
- 功能和设计要素
- 车顶架
- 导水器
- 窗密封件

### 材料属性

- 包胶 PP
- 热稳定性
- 可在制造过程中回收利用
- 出色的压缩永久变形性能
- 优异的机械特性
- 表面映射
- 耐候性, 适合汽车外饰

### 法规 / 批准

- 49 CFR §571.302 (FMVSS 302)
- 宝马 GS 93042
- DIN 75201-B - 雾化值
- FCA MS-DC-242
- 福特 WSS-M2D517
- 通用汽车 GMW 15702
- 通用汽车 GMW 16233
- 奔驰 DBL 5562
- 室外耐候性测试 亚利桑那 24 个月 SAE J1976
- 室外耐候性测试 佛罗里达 24 个月 SAE J1976
- PSA B62 0300
- PV 3929 卡拉哈里试验 (1年) - 耐候性测试
- PV 3929 卡拉哈里试验 (2年) - 耐候性测试
- PV 3930 佛罗里达试验 (1年) - 耐候性测试
- PV 3930 佛罗里达试验 (2年) - 耐候性测试
- 雷诺 03-10-104
- UL 94 HB
- VDA 270 B3 - 气味
- VW 50123

## THERMOLAST® K | 热塑宝 K

### Series 系列

### VS/AD/HM

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxCEN		60 – 80 Shore A		Natural	本色		
TCxCEU		60 – 80 Shore A		Natural	本色	ABS, ASA, PA, PC, PC/ABS, SAN	
TCxCEZ		60 – 80 Shore A		Black	黑色		

### Typical Applications

- Automotive Interior
- Car mats
- Function and design elements
- Handles
- Soft touch surface (thumb wheels, push buttons, switches)

### Material Advantages

- Abrasion resistance
- Adhesion to PA6 and PA12
- Adhesion to PC, ABS, PC/ABS, ASA, SAN
- Halogen content (chlorine + bromine) < 900 ppm
- Optimized mechanical properties
- Resistance to skin oils, sunscreen or olive oil
- Scratch resistance
- Soft, velvety feel

### Regulations / Approvals

- 49 CFR §571.302 (FMVSS 302)
- BMW GS 93042
- DIN 75201-B – 雾化值
- DIN EN ISO 105-B06 Method 3
- Mercedes-Benz DBL 5562
- PSA B62 0300
- Renault 03-10-104
- UL 94 HB
- VDA 270 B3 – Odor
- VW 50123

### 典型应用

- 汽车内饰
- 车垫
- 功能和设计要素
- 手柄
- 软质表面 (拨轮、按键、开关)

### 材料属性

- 耐磨性
- 包胶 PA6 和 PA12
- 包胶 PC、ABS、PC/ABS、ASA、SAN
- 卤素含量 (氯+溴) < 900 ppm
- 优异的机械特性
- 耐皮肤油脂、防晒霜或橄榄油
- 耐刮擦
- 天鹅绒般柔软触感

### 法规 / 批准

- 49 CFR §571.302 (FMVSS 302)
- 宝马 GS 93042
- DIN 75201-B - 雾化值
- DIN EN ISO 105-B06 Method 3
- 奔驰 DBL 5562
- PSA B62 0300
- 雷诺 03-10-104
- UL 94 HB
- VDA 270 B3 - 气味
- VW 50123

## THERMOLAST® V | 热塑宝 V

### Series 系列

#### LTP

The LTP series is your material solution for applications with sealing function and temperature resistance requirements. The compounds are characterized by their adhesion to PP. They are available in black and natural colors. Natural color variants can be colored in many different ways.

LTP 系列材料解决方案适用于要求密封性和耐高温应用。这类化合物具有包胶 PP 的特点。可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TVxLVN		50 – 90 Shore A		Natural	本色		
TVxLVZ		50 – 90 Shore A		Black	黑色	PP	
<b>Typical Applications</b>							
<ul style="list-style-type: none"> <li>Applications in e-mobility</li> <li>Bumpers</li> <li>Fastenings</li> <li>Grommets</li> <li>Seals</li> </ul>							
<b>Material Advantages</b>							
<ul style="list-style-type: none"> <li>Adhesion to PP</li> <li>Hysteresis</li> <li>In-process recycling possible</li> <li>Long term sealing function</li> <li>Optimized compression set</li> <li>Optimized mechanical properties</li> <li>Resistance to polar coolants</li> <li>Temperature stability up to 120 °C</li> </ul>							
<b>Regulations / Approvals</b>							
<ul style="list-style-type: none"> <li>BMW GS 93042</li> <li>GM GMW15702</li> <li>Mercedes-Benz DBL 5562</li> <li>PSA B62 030</li> <li>UL 94 HB</li> <li>VW 50123</li> </ul>							
<b>法规 / 批准</b>							
<ul style="list-style-type: none"> <li>宝马 GS 93042</li> <li>通用汽车 GMW15702</li> <li>奔驰 DBL 5562</li> <li>PSA B62 0300</li> <li>UL 94 HB</li> <li>VW 50123</li> </ul>							

## THERMOLAST® V | 热塑宝 V

### Series 系列

#### LTP/PA

The LTP/PA range is your material solution for sealing applications and temperature resistance requirements. The compounds are characterized by their adhesion to PA. The compounds are available in black and natural. Natural color variants can be colored in a variety of ways.

LTP/PA 系列材料解决方案适用于要求密封性和耐高温应用。这类化合物具有包胶 PA 的特点。该化合物产品可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TVxVAN		60 – 80 Shore A		Natural	本色		
TVxVAZ		50 – 80 Shore A		Black	黑色	PP	
<b>Typical Applications</b>							
<ul style="list-style-type: none"> <li>Applications in e-mobility</li> <li>Bumpers</li> <li>Fastenings</li> <li>Grommets</li> <li>Seals</li> </ul>							
<b>Material Advantages</b>							
<ul style="list-style-type: none"> <li>Adhesion to PA6 and PA6.6</li> <li>Adhesion to PA12</li> <li>Hysteresis</li> <li>In-process recycling possible</li> <li>Long-term sealing function</li> <li>Optimized compression set</li> <li>Optimized mechanical properties</li> <li>Resistance to polar coolants</li> <li>Temperature stability up to 120 °C</li> </ul>							
<b>Regulations / Approvals</b>							
<ul style="list-style-type: none"> <li>BMW GS 93042</li> <li>Mercedes-Benz DBL 5562</li> <li>UL 94 HB</li> <li>VW 50123</li> </ul>							
<b>法规 / 批准</b>							
<ul style="list-style-type: none"> <li>宝马 GS 93042</li> <li>奔驰 DBL 5562</li> <li>UL 94 HB</li> <li>VW 50123</li> </ul>							

## For Tec E® | 尼塑宝 ®

### Series 系列

#### AD/PAX/CR

The AD/PAX/CR series is your material solution for applications with velvet touch. The material has increased resistance to skin oils, sun cream and olive oil. The compounds are characterized by their adhesion to polyamides, partially aromatic polyamides and polarylamides. The compounds are available in black and natural colors. Natural color variants can be colored in many different ways.

AD/PAX/CR 系列材料解决方案适用于有柔软触感要求的应用领域。该系列材料可更好地抵抗皮肤油脂、防晒霜和橄榄油。这类化合物对聚酰胺、部分芳族聚酰胺和聚丙烯酰胺具有包胶性。这类化合物有黑色和本色可选。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
OCxOAN		60 – 80 Shore A		Natural	本色		
OCxOAZ		60 – 80 Shore A		Black	黑色	PA	
<b>Typical Applications</b>							
<ul style="list-style-type: none"> <li>Function and design elements</li> <li>Soft touch for grips, switches and mats</li> </ul>							
<b>Material Advantages</b>							
<ul style="list-style-type: none"> <li>Adhesion to PA6 and PA6.6, up to 50% glass fiber</li> <li>Adhesion to PA12</li> <li>Adhesion to partially aromatic polyamides (PAX) and polarylamides (PARA)</li> <li>Colorable</li> <li>Non-sticky surface</li> <li>Resistance to skin oils, sunscreen or olive oil</li> </ul>							
<b>Regulations / Approvals</b>							
<ul style="list-style-type: none"> <li>UL 94 HB</li> </ul>							

▪ 包胶 PA6 和 PA6.6 , 玻璃纤维高达 50%

▪ 包胶 PA12

▪ 包胶部分芳族聚酰胺 (PAX) 和聚丙烯酰胺 (PARA)

▪ 可染色

▪ 不粘表面

▪ 耐皮肤油脂、防晒霜或橄榄油

### 法规 / 批准

▪ UL 94 HB



EUROPE, MIDDLE EAST, AFRICA  
欧洲、中东、非洲

KRAIBURG TPE GmbH & Co. KG  
Friedrich-Schmidt-Str. 2  
84478 Waldkraiburg, Germany

📞 +49 8638 9810-0  
✉️ info@kraiburg-tpe.com

ASIA PACIFIC  
亚太

KRAIBURG TPE Technology (M) SDN.BHD.  
Lot 1839 Jalan KPB 6  
Kawasan Perindustrian Balakong  
43300 Seri Kembangan, Selangor, Malaysia

📞 +60 3 9545 6393  
✉️ info-asia@kraiburg-tpe.com

AMERICAS  
美洲

KRAIBURG TPE Corporation  
4365 Hamilton Mill Road  
Buford, GA 30518, USA

📞 +1 678 584-5020  
✉️ info-america@kraiburg-tpe.com

For contact details of our branch offices and partners, see [www.kraiburg-tpe.cn](http://www.kraiburg-tpe.cn). Member of the KRAIBURG Holding.

© Copyright 2023 KRAIBURG TPE. Subject to change without prior notice.

KRAIBURG TPE makes no warranties and assumes no liability in connection with any use of this information.

如需查询我们分支机构和合作伙伴的详细联系信息, 请访问 [www.kraiburg-tpe.cn](http://www.kraiburg-tpe.cn). Member of the KRAIBURG Holding.

© Copyright 2023 KRAIBURG TPE. 本信息内容如有更改, 恕不另行通知。

凯柏胶宝® 对此信息不做任何保证, 亦不承担任何责任。